



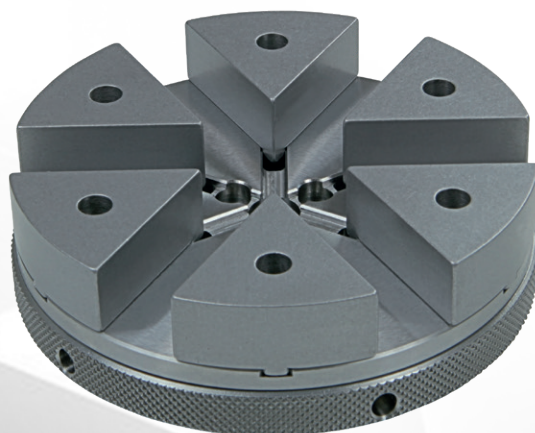

Flyer-Download

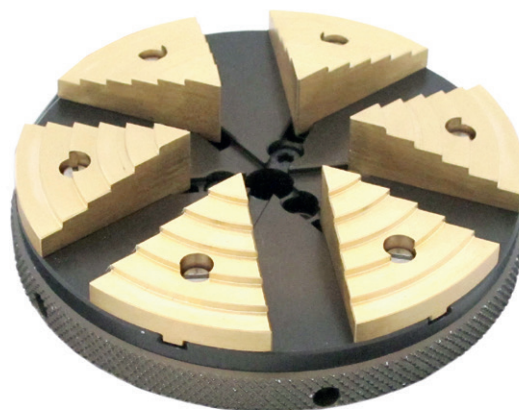


Clamping chuck JF

High-precision chuck: Perfection for decades

- Manufacture quality
- Versatile application options
- Customized adaptations
- 2 to 8-jaw system

Clamping chuck JF, including one set of reversible top jaws type D Blank

Type D	Item No.	Clamping range [mm] outside - inside		Jaw travel [mm]
JF 3D 55	193516.00	1-61	13-50	6.5
JF 6D 55	193515.00	1-61	13-50	6.5
JF 3D 70	193536.00	1-71	17-64	11
JF 6D 70	193535.03	1-71	17-64	11
JF 3D 100	195089.00	1.5-99.5	27-96	18
JF 6D 100	193571.03	1.5-99.5	27-96	18
JF 8D 150	195035.00	1.5-141	46-140	24

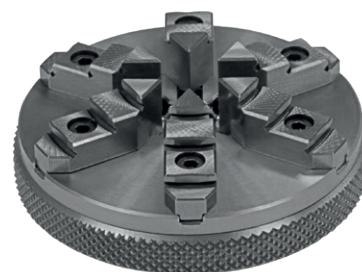


Anti-corrosive

Type D	Item No.	Clamping range [mm] outside - inside		Jaw travel [mm]
JF 3D 55	193516.63	1-61	13-50	6.5
JF 6D 55	193515.63	1-61	13-50	6.5
JF 3D 70	193536.63	1-71	17-64	11
JF 6D 70	193535.63	1-71	17-64	11
JF 3D 100	195089.63	1.5-99.5	27-96	18
JF 6D 100	193571.63	1.5-99.5	27-96	18
JF 3D 150	10162.002	1.5-141	46-140	24
JF 8D 150	195035.10	1.5-141	46-140	24
JF 3D 200	195280.00	1.5-210	45-208	35
JF 6D 200	10118.001	1.5-210	45-208	35




Clamping chucks JF, including one set of top jaws type A, B, C or DW, W


Type A	Item No.	Clamping range [mm] - inside		Jaw travel [mm]
JF 6A 55	193512.00	10-48		6.5
JF 6A 70	193532.00	12-62		11
JF 6A 85	193552.00	17-78		16
JF 6A 100	193568.00	16-90		18
JF 8A 125	193584.00	19-134		20
JF 8A 150	193593.03	26-150		24

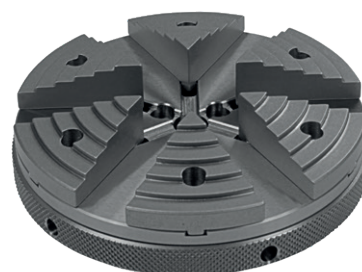


Type B	Item No.	Clamping range [mm] - outside		Jaw travel [mm]
JF 6B 55	193513.00	10-48		6.5
JF 6B 70	193533.00	12-62		11
JF 6B 85	193553.00	17-78		16
JF 6B 100	193569.00	16-90		18
JF 8B 125	193585.00	15-134		20
JF 8B 150	193594.00	22-150		24

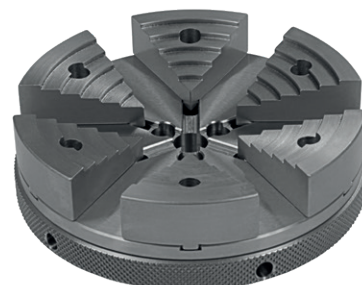


Type C	Item No.	Clamping range [mm] outside - inside		Jaw travel [mm]
JF 6C 55	194400.00	10-44	35-48	6.5
JF 6C 70	194403.00	12-51	53-62	11
JF 6C 85	194407.00	17-67	48-78	16
JF 6C 100	194411.00	16-79	58-90	18
JF 8C 125	194417.00	15-102	82-134	20
JF 8C 150	194418.00	22-123	104-150	24

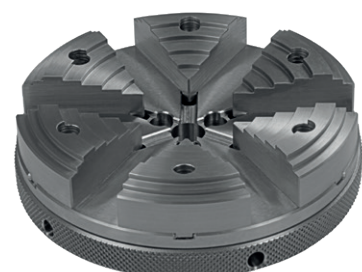

Type DW	Item No.	Jaw travel [mm]
JF 6DW 55	195020.00	6.5
JF 6DW 70	195308.00	11
JF 3DW 70	195309.00	16
JF 6DW 100	195307.00	18
JF 8DW 125	195307.00	20
JF 8DW 150	195023.00	24

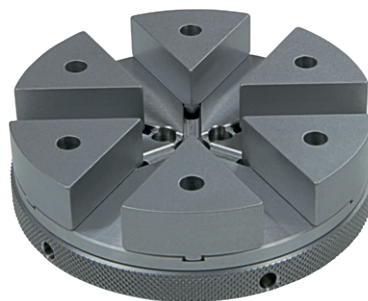

Type W	Item No.	Jaw travel [mm]
JF 6W 55	193514.00	6.5
JF 6W 70	193534.00	11
JF 6W 85	193554.00	16
JF 6W100	193570.00	18
JF 8W125	193586.00	20
JF 8W150	193595.00	24

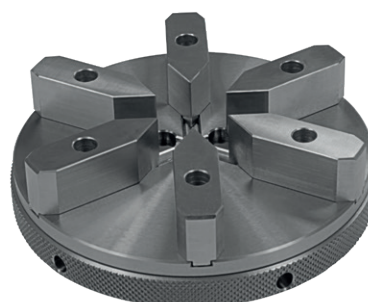

Technical data

- Repetitiveness: 5 μ
- Lateral runout: 10 μ
- Concentricity: 20 μ
- Blank JF clamping chucks are greased, therefore also suitable for use in machining
- Surface hardness: D jaws are case hardened as standard
- Replacement jaws
- Clamping chucks: Other sizes on request
- Top jaws: Special designs on customer request
- Torque screwdriver for jaw assembly
- Safety torque wrench
- Corrosion-protected
- Even higher accuracies are possible on request

Various shafts, all of which are compatible with the respective Maprox products.



MK with internal thread



MK with forcing nut (M22 x 1.5) and internal thread




ISO 40



Options

- Cylindrical, Cintra and C3 shafts
- Custom-made products of all kinds

JF 55

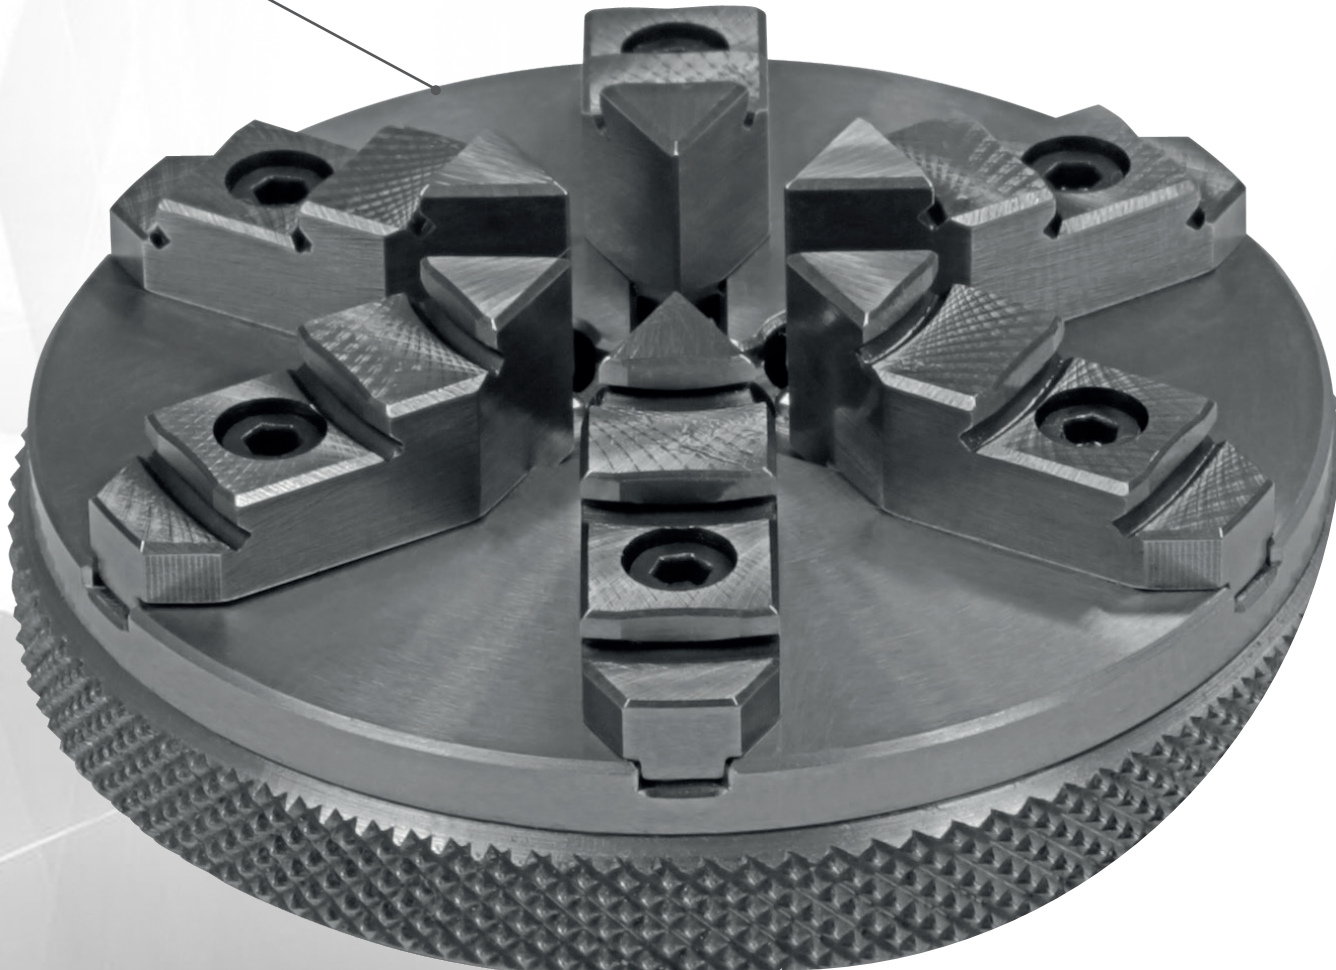

TRANSFORMING YOUR
GOOD IDEAS
INTO GREAT SOLUTIONS



Maprox AG
Usterstrasse 87
CH-8620 Wetzikon
Tel: +41 (0)43 488 18 00
Fax: +41 (0)43 488 18 08
info@maprox.ch • www.maprox.ch

